




Model PT-50

2-Way Fast Reading Digital Folding Thermocouple Probe Thermometer

Front

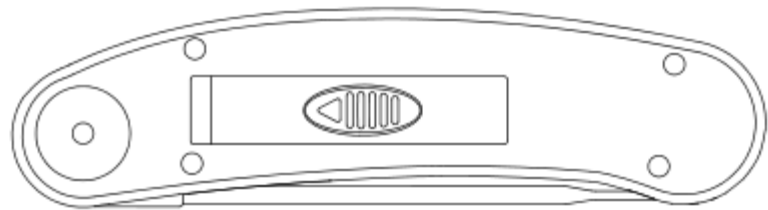

Back

Thank you for selecting Maverick's model # PT-50 2-Way Fast Reading Digital Folding Thermocouple Probe Thermometer for your cooking needs. This unit features a fold out probe with thin tip for faster and more accurate temperature. The 2-Way feature allows you to select Left hand or Right hand which rotates the LCD display 180 degrees for easiest viewing with either hand. Enjoy perfectly cooked food, each and every time!

Buttons

HOLD – Once temperature is reached you can press to lock the display. An "H" will appear on the LCD. Press it again to release it.

CAL – You can calibrate the thermometer. Insert the probe tip into water at a known temperature such as an ice water bath at 32 ° F or boiling water at 212 ° F. Press and hold the CAL button until the LCD display flashes and then press the

HOLD button (above the CAL button) to raise the display temperature to the known temperature or press ° F/° C button (below the CAL button) to lower the display temperature. Stop pressing the CAL button and the new calibrated temperature will stop flashing in a few seconds. The thermometer has now been calibrated.

° F /° C – switches between Fahrenheit and Celsius.

L/R – Switches between Right hand and Left hand and rotates the temperature in the display 180 degrees

Other Features

The unit turns off automatically when the probe is closed.

The LCD has a backlight that turns on automatically for approximately 30 seconds when the probe is opened or whenever any button is pushed.

The unit has a Low battery display to indicate when batteries need to be changed. BLO will appear on the display.

Before First Use

- There is a **static cling label** over the LCD display and a protective film over the whole black **faceplate**, please remove before use.
- Your unit comes with 2 AAA batteries. Remove the battery door on the back of the unit and insert the batteries with proper +/- (polarity) orientation
- Clean the stainless steel tip with warm soapy water. Rinse and let dry.
- The unit should NOT be submerged in water or put in a dishwasher.
- Do not leave unit in oven or grill.
- Read all instructions

Getting Started

- Unfold probe completely into the open and locked position

Insert into meat or food up to 1" for an accurate reading.

Operating Range

- Temperature sensor is in the tip of the probe.
- The unit will take temperature range from -40° F to 660° F.

Care of Your Thermometer

- Do not place the unit in the dishwasher.

- Do not immerse in water. To clean the probe, use a warm soapy cloth.
- Do not leave exposed to high heat or low temperatures.

Replacing Battery

- On the back of the unit there is a battery door. Slide in the direction of the arrow to open. The batteries are easily accessible for removal. Replace the batteries according to the polarity markings inside the unit and close the door. Turn on the unit to test new batteries.

MAVERICK LIMITED 90 DAY WARRANTY

Maverick Industries Inc. warrants this product to be free of defects in parts, materials and workmanship for a period of 90 days, from date of purchase. Should any repairs or servicing under this warranty be required, contact Maverick Customer Service by mail or phone for instructions on how to pack and ship the product to Maverick's National Service Center located as follows:

Maverick Customer Service

94 Mayfield Ave.

Edison NJ 08837

Telephone: (732) 417-9666

Hours: Weekdays 8:30 AM- 4:30 PM

This warranty is VOID if instructions for use are not followed; for accidental damage; for commercial use; for damage incurred while in transit; or if the product has been tampered with.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

www.maverickhousewares.com