

MARK 5HD™



Pick up a Mark 5HD™ and you'll feel the difference; it's up to 20 ounces lighter than other scopes in its class. Get behind one and you'll see the difference, from the superior edge-to-edge clarity and extreme low-light performance to the versatility of the PR2™ reticle. With three revolutions of elevation adjustment, the Mark 5HD was built to max out the performance of the latest long range rifles and ammunition. It's ergonomically designed with more tactile, audible click adjustments, larger numbers, and a high-speed throw lever, so you can put accurate rounds downrange faster. And like all Leupold riflescopes, it's designed, machined, and assembled in the USA and guaranteed for life.

KEY BENEFITS

Leupold's Professional-Grade Optical System delivers the light transmission, glare reduction, and resolution professional guides and shooters demand

Provides accurate holdovers throughout the magnification range with front focal plane reticles

Engages targets at any distance with a large 5x magnification range

Extends long-range shooting with a lightweight 35mm maintube

Delivers 120 MOA or 34.9 MIL of travel using a precise and repeatable 3-turn ZeroLock® dial

Creates a visible aiming point in low-light conditions with illuminated reticles

Improves magnification changes with a removeable throw lever

Disperses recoil energy for unrivaled durability with ultra-lightweight construction

Superior ruggedness is verified through Leupold's Punisher testing process

Waterproof, fogproof, and guaranteed to perform for life

MAGNIFICATION RANGES

2-10x30



3.6-18x44



5-25x56



7-35x56




MARK 5HD

TACTICAL SCOPES

Mark 5HD	A	B	C	D	E	F	G	H	K	Obj. (mm)	Weight (oz)	Eye Relief Low/High (in)	FOV Low/High (ft @ 100 yd)	Elev. Adj. MOA	Wind Adj. MOA	Part Number	UPC Code
2-10x30 MIC3 FFP	11.2	5.9	1.7	2.0	3.3	1.9	1.6	1.8	35mm	30	24.0	3.6/3.7	52.9/10.5	165	80	H 179704	030317026455
2-10x30 M5C3 FFP	11.2	5.9	1.7	2.0	3.3	1.9	1.6	1.8	35mm	30	24.0	3.6/3.7	52.9/10.5	165	80	A 179702	030317026424
														165	80	E 179703	030317026448
3.6-18x44 M5C3 FFP	12.1	5.9	1.7	2.0	3.3	2.9	2.1	1.8	35mm	44	26.0	3.5/3.8	28.3/5.8	120	60	A 173296	030317016357
														100	80	B 173297	030317016371
														120	60	B 173298	030317016388
														120	60	D 173299	030317016364
														120	60	E 173301	030317016395
														120	60	F 176811	030317021627
														120	60	M 180725	030317028787
														120	60	L 180726	030317028794
3.6-18x44 MIC3 FFP	12.1	5.9	1.7	2.0	3.3	2.9	2.1	1.8	35mm	44	26.0	3.5/3.8	28.3/5.8	100	80	H 176445	030317021108
														100	80	I 176446	030317021115
5-25x56 M5C3 FFP	15.7	6.2	2.0	2.0	3.3	6.2	2.5	1.8	35mm	56	30.0	3.6/3.8	20.4/4.2	100	80	A 171772	030317012908
														100	50	B 171773	030317012939
														100	50	B 171774	030317012960
														100	80	D 171775	030317012922
														120	60	E 171776	030317012946
														120	60	F 171777	030317012953
														100	80	L 180609	030317028381
														100	80	M 180610	030317028473
														100	80	N 180222	030317026882
														100	50	H 176448	030317021122
5-25x56 MIC3 FFP	15.7	6.2	2.0	2.0	3.3	6.2	2.5	1.8	35mm	56	30.0	3.6/3.8	20.4/4.2	120	60	I 176449	030317021085
														100	50	O 180291	030317027568
7-35x56 M5C3 FFP	15.7	6.2	2.0	2.0	3.3	6.2	2.5	1.8	35mm	56	33.0	3.6/3.8	14.7/ 3.0	100	50	B 174545	030317018412
														100	80	B 174546	030317018405
														100	50	N 180223	030317026899
														100	50	E 176124	030317020842
														100	50	A 176594	030317021313
														100	50	D 177332	030317022648
7-35x56 MIC3 FFP	15.7	6.2	2.0	2.0	3.3	6.2	2.5	1.8	35mm	55	30.0	3.6/3.8	14.7/3.0	100	50	F 177333	030317022631
7-35x56 MIC3 SFP	15.7	6.2	2.0	2.0	3.3	6.2	2.5	1.8	35mm	56	33.0	3.6/3.8	14.7/ 3.0	100	50	O 180292	030317027537
7-35x56 MIC3 SFP	15.7	6.2	2.0	2.0	3.3	6.2	2.5	1.8	35mm	56	33.0	3.6/3.8	14.7/ 3.0	100	50	X 174549	030317018399

FFP = First Focal Plane
SFP = Second Focal Plane

SCOPE DIMENSIONS

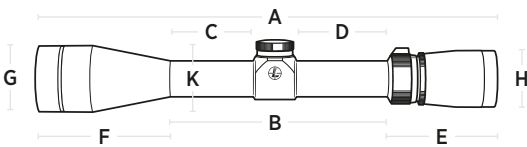

KEY FEATURES

- Professional-Grade Optical System
- 5:1 zoom ratio
- 35mm maintube
- Ultra-lightweight design
- High-speed power selector
- Removable throw lever
- M5C3 and M1C3 ZeroLock adjustments
- MIL or MOA adjustments/reticles
- 3-turn dial, 10.5 MIL per turn with tactile revolution indicators
- Precise tracking and return to zero
- Lens shade
- Lens covers
- Waterproof
- Fogproof
- Guaranteed for life

ILLUMINATED RETICLE FEATURES

- Motion Sensor Technology (MST)
- Dial illumination

AVAILABLE RETICLES

■ Illuminated Reticle

