



PRODUCT FACT SHEET

ProTac® 90X USB / ProTac® 90X

MULTI FUEL - USB LI-ION RECHARGEABLE or 2X CR123A FLASHLIGHT

MARKET

APPLICATIONS: Professional Light - Hardware/Tool, Industrial, Law Enforcement, Security, Automotive, Sporting Goods, Consumer.

DESCRIPTION: The ProTac® 90X USB or ProTac® 90X are 1000 lumen tactical lights that can use either a proprietary Streamlight® SL-B26™ Li-Ion rechargeable battery pack or Two CR123A disposable batteries. The ProTac® 90X USB is a complete rechargeable system that comes with a charge cord and a USB Li-Ion button top battery that features an integrated micro-USB charge port. The ProTac® 90X comes packaged with two CR123A batteries. Both lights feature a tactical switch for momentary or constant on operation, three different user selectable programs and a pocket clip for convenience. The aluminum housing with Type II Military Spec anodizing helps make the lights extremely durable and abrasion resistant. Packaged with a removable pocket clip and holster. Available in Black.

CASE MATERIAL: 6000 series machined aircraft aluminum with Type II MIL-Spec anodized finish. Available in Black.

DIMENSIONS: Length: 4.39 in. (11.1 cm) Head Diameter: 1.14 in. (2.9 cm) Body Diameter: .940 in. (2.4 cm)

WEIGHT: ProTac® 90X USB: 4.9 oz (139 grams) with one Streamlight® SL-B26™ protected Li-Ion USB rechargeable battery pack. (included in purchase).
ProTac® 90X: 4.4 oz (125 grams) with two CR123A batteries (included in purchase).

LENS: Glass lens; gasket sealed.

LIGHT SOURCE: LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: See chart. Regulated output for consistent lumen performance over the battery life.

ON/OFF: Multi-function, push-button tactical switch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP® programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/med/high.

RUN TIME: See charts for specific battery type. All runtime claims are to 10% of initial lumen output.

BATTERY: One (1) Streamlight® SL-B26™ protected Li-Ion USB rechargeable battery pack with on-board safety control, 2600mAh, Rechargeable up to 500 times. Recharges in 5 hours.
Two (2) 3 Volt CR123A Lithium batteries with a storage life of 10 years.

FEATURES:



LED technology for extreme brightness.
IPX7 rated design; waterproof to 1 meter for 30 minutes. All openings o-ring sealed.
2 meter impact resistance tested.
Multi fuel; accepts Streamlight® SL-B26™ or CR123A batteries.
TEN-TAP® programmable switch allows user to select one of three different programs.
Anti-roll face cap.
Serialized for positive identification.
Removable pocket clip and Holster

APPROVALS: Meets applicable European Community Directives.
 CEC compliant (ProTac® 90X USB only)

WARRANTY: Streamlight's Limited Lifetime Warranty


OPTIONAL

ACCESSORIES: Holster, Charge cords.

	WITH CR123A BATTERIES				WITH USB LI-ION RECHARGEABLE BATTERY			
	FL1 STANDARD	HIGH	MEDIUM	LOW	FL1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		1,000 LUMENS	300 LUMENS	65 LUMENS		1,000 LUMENS	300 LUMENS	65 LUMENS
RUNTIME		2h 30min	4h	21h		1h 45min	4h 45min	24h
DISTANCE		171m	91m	42m		171m	91m	42m
INTENSITY		7,350cd	2,060cd	450cd		7,350cd	2,060cd	450cd

Strobe Run Time: 2.5 Hours

Strobe Run Time: 3.5 Hours

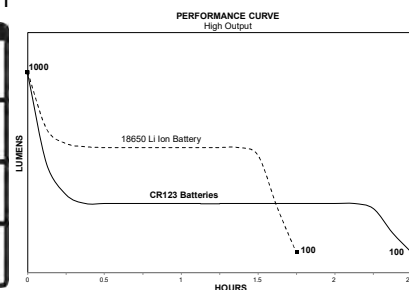

All performance claims to ANSI/PLATO FL1-2019 Standard

Issued: 03/3/2020
Revised: 06/11/2020

Rev: 1

Made In China

Document #349