



SPORTSMAN'S GUIDE PRODUCT ASSORTMENT

Wednesday, March 29, 2023

KILO CANYON

KILO CANYON 6X22mm Monocular

DIGITAL BALLISTIC LASER RANGEFINDER



KILO CANYON

6X22mm Monocular

SOKCN606

- ▶ 6x22 mm monocular with SpectraCoat™ anti-reflection coatings for superior light transmission and optical clarity
- ▶ Revolutionary Lightwave™ DSP Technology for the fastest and longest distance rangefinder engine
- ▶ HyperScan provides 4x range updates per second in scan mode while RangeLock reports the last range result when ranging distant targets
- ▶ Features line of sight or angle modified range
- ▶ 8 onboard ballistic groups provide solutions in either MOA or MRAD
- ▶ Units in yards or meters to tenth Y/M resolution
- ▶ Red LED illuminated display
- ▶ Compact, lightweight polymer housing with eyecup and diopter adjustment

▲ GRP 3.1'
○ MRAD
459.2_y

BALLISTIC SOLUTION MRAD

▲ GRP 7.8
○ MOA
392.8_y

BALLISTIC SOLUTION MOA

- 5°
○
68.5_y

LINE OF SIGHT


KILO CANYON

PRODUCT DETAILS		
SKU#	SOKCN606	
MAGNIFICATION	6X	
RETICLE	CIRCLE	
DISPLAY	RED LED	
OBJECTIVE LENSE DIAMETER	22MM	
FIELD OF VIEW	6.5 DEGREES	
EYE RELIEF	18MM	
LASER DIVERGENCE	1.50X0.2 MRAD	
RUN TIME	4000 RANGES	
BATTERY TYPE	CR2	
WATER PROOF RATING	IPX-4	
MAX RANGE	REFLECTIVE= 3000Y DEER=1000Y TREE= 1200Y	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	4.6 in	116 mm
OVERALL HEIGHT	2.9 in	74 mm
OVERALL WIDTH	1.3 in	33 mm
OVERALL LENGTH	5.2 oz	150 g

KILO 3K

KILO3K 6X22mm Monocular

BALLISTIC RANGEFINDER

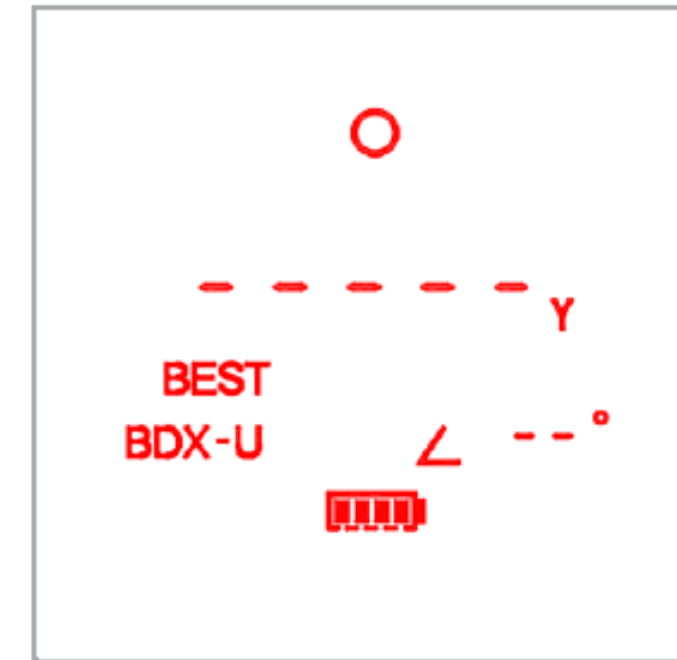

DISPLAY



BALLISTIC SOLUTION MOA

KILO3K

6X22mm Monocular

SOK3K602

- ▶ ONBOARD TEMPERATURE, PRESSURE, AND HUMIDITY SENSORS FOR ACCURATE REAL-TIME BALLISTIC CALCULATIONS
- ▶ 5 TARGET MODES; FIRST, BEST, LAST, FOG, EXTENDED RANGE
- ▶ 5 RANGE MODES; BDX-U, BDX-X, AMR, LOS, ARCHERY
- ▶ DROP REMOTE WAYPOINTS WITH BASEMAP APP
- ▶ APPLIED BALLISTICS ULTRALITE WITH COMPLETE AB BULLET DATABASE, UP TO 25 BULLET PROFILES AND 8 ONBOARD BALLISTIC GROUPS
- ▶ BDX 2.0 ENABLED WITH LOW ENERGY, LONG RANGE BLUETOOTH

KILO 3K

PRODUCT DETAILS		
SKU#	S0K3K602	
MAGNIFICATION	6X	
RETICLE	CIRCLE	
DISPLAY	SEGMENTED OLED	
OBJECTIVE LENSE DIAMETER	22mm	
FIELD OF VIEW	6.5 DEGREES	
EYE RELIEF	18MM MINIMUM	
LASER DIVERGENCE	1.5X0.2 MRAD	
RUN TIME	4000 RANGES MINIMUM	
BATTERY TYPE	CR2	
WATER PROOF RATING	IPX-4	
MAX RANGE	REFLECTIVE= 3000Y DEER=1500Y TREE= 1800Y	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	4.6 in	116 mm
OVERALL HEIGHT	2.9 in	74 mm
OVERALL WIDTH	1.3 in	33 mm
OVERALL LENGTH	5.5 oz	156 g

KILO4K


KILO4K OIS 6X22mm Monocular BALLISTIC RANGEFINDER

KILO4K


6X22mm Monocular

SOK4K601

- ▶ OPTICAL IMAGE STABILIZATION FOR LONG DISTANCE, RAZOR-SHARP IMAGING
- ▶ GEN II LIGHTWAVE DSP RANGING ENGINE
- ▶ ONBOARD TEMPERATURE, PRESSURE, AND HUMIDITY SENSORS FOR ACCURATE REAL-TIME BALLISTIC CALCULATIONS
- ▶ 5 TARGET MODES; FIRST, BEST, LAST, FOG, EXTENDED RANGE
- ▶ 5 RANGE MODES; BDX-U, BDX-X, AMR, LOS, ARCHERY
- ▶ DROP REMOTE WAYPOINTS WITH BASEMAP APP
- ▶ APPLIED BALLISTICS ULTRALITE WITH COMPLETE AB BULLET DATABASE, UP TO 25 BULLET PROFILES AND 8 ONBOARD BALLISTIC GROUPS
- ▶ BDX 2.0 ENABLED WITH LOW ENERGY, LONG RANGE BLUETOOTH
- ▶ IPX-7 WATERPROOF, RUNS OFF CR123 LITHIUM BATTERY AND INTEGRATED TRIPOD MOUNT

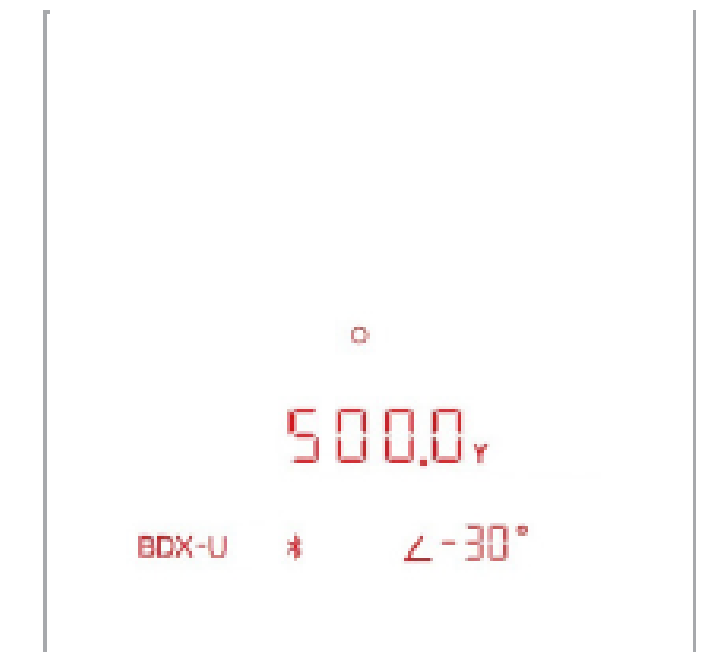

RANGE DISPLAY

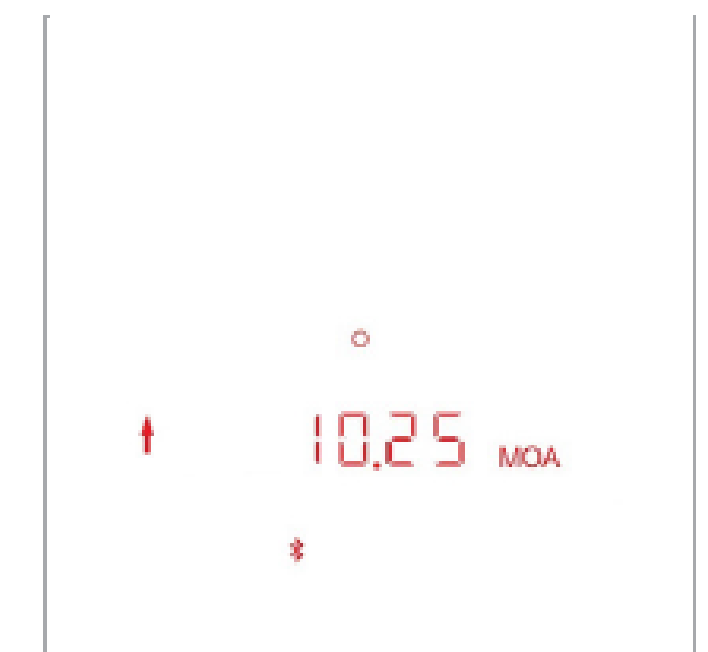

BALLISTIC SOLUTION MOA

KILO4K

PRODUCT DETAILS		
SKU#	SOK4K601	
MAGNIFICATION	6X	
RETICLE	CIRCLE WITH MILLING GRID	
DISPLAY	TOLED	
OBJECTIVE LENSE DIAMETER	22mm	
FIELD OF VIEW	6.5 DEGREES	
EYE RELIEF	15MM MINIMUM	
LASER DIVERGENCE	1.25X0.25 MRAD	
RUN TIME	4000 RANGES MINIMUM	
BATTERY TYPE	CR123	
WATER PROOF RATING	IPX-7	
MAX RANGE	REFLECTIVE= 4000Y DEER=1600Y TREE= 2000Y	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	4.1 in	104 mm
OVERALL HEIGHT	3.1 in	78 mm
OVERALL WIDTH	1.6 in	40.5 mm
OVERALL LENGTH	7.3 oz	207 g

KILO5K



KILO5K 7 x 25 mm Monocular

BALLISTIC RANGEFINDER



BXD APP



RANGE DISPLAY



BALLISTIC SOLUTION

KILO5K

7 X 25 MM MONOCULAR

SOK5K705

- ▶ GEN II LIGHTWAVE DSP RANGING ENGINE WITH EXTENDED RANGE (XR) MODE
- ▶ ONBOARD ENVIRONMENTAL SENSORS FOR REAL-TIME BALLISTIC CALCULATIONS
- ▶ DROP REMOTE WAYPOINTS WITH BASEMAP APP
- ▶ APPLIED BALLISTICS ULTRALITE WITH COMPLETE AB BULLET DATABASE, UP TO 25 CUSTOM BULLET PROFILES AND 8 ONBOARD BALLISTIC GROUPS
- ▶ BXD 2.0 ENABLED WITH LOW ENERGY, LONG RANGE BLUETOOTH

SKU#:	SOK5K705
UPC:	798681628025
MTP:	\$449.99
MAP:	\$599.99
MSRP:	\$779.99

KILO5K



KILO5K 7 x 25 mm Monocular

BALLISTIC RANGEFINDER

PRODUCT DETAILS		
SKU#	SOK5K705	
MAGNIFICATION	7x	
RETICLE	CIRCLE WITH MILLING GRID	
DISPLAY	SEGMENTED OLED	
OBJECTIVE LENS DIAMETER	25 mm	
FIELD OF VIEW	6.78'	
EYE RELIEF	15 mm MINIMUM	
LASER DIVERGENCE	1.3 MRAD	
RUN TIME	4000 RANGES MINIMUM	
BATTERY TYPE	CR2	
WATER PROOF RATING	IPX-4	
MAX RANGE	REFLECTIVE= up to 5,000 yrds TREE = up to 2,500 yrds DEER = up to 2,000 yrds	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	4.4 in	112mm
OVERALL HEIGHT	3 in	76mm
OVERALL WIDTH	1.3 in	33mm
WEIGHT	7.5 oz	215g



KILO6KHD 10X42mm

KILO6K HD 10x42 mm Binocular

BALLISTIC RANGEFINDER




KILO6K HD

10x42mm Rangefinding Binocular

SOK6K105

- ▶ ONBOARD TEMPERATURE, PRESSURE, AND HUMIDITY SENSORS FOR ACCURATE REAL-TIME BALLISTIC CALCULATIONS
- ▶ 5 TARGET MODES; FIRST, BEST, LAST, FOG, EXTENDED RANGE
- ▶ 5 RANGE MODES; BDX-U, BDX-X, AMR, LOS, ARCHERY
- ▶ DROP REMOTE WAYPOINTS WITH BASEMAP APP
- ▶ APPLIED BALLISTICS ULTRALITE WITH COMPLETE AB BULLET DATABASE, UP TO 25 BULLET PROFILES AND 8 ONBOARD BALLISTIC GROUPS
- ▶ BDX 2.0 ENABLED WITH LOW ENERGY, LONG RANGE BLUETOOTH
- ▶ IPX-7 WATERPROOF

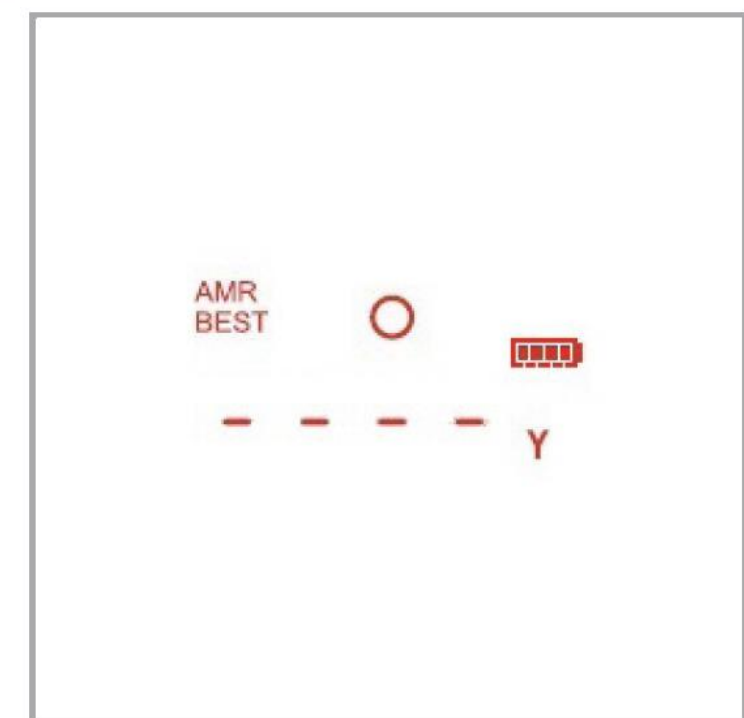

RETICLE


KILO6KHD 10X42mm

PRODUCT DETAILS		
SKU#	S0K6K105	
MAGNIFICATION	10X	
RETICLE	CIRCLE	
DISPLAY	SEGMENTED OLED	
OBJECTIVE LENSE DIAMETER	42mm	
FIELD OF VIEW	6.1 DEGREES	
EYE RELIEF	18MM	
LASER DIVERGENCE	1.5 X .06 MRAD	
RUN TIME	4000 RANGES MINIMUM	
BATTERY TYPE	CR2	
WATER PROOF RATING	IPX-7	
MAX RANGE	REFLECTIVE= 6000Y DEER=2000Y TREE= 4000Y	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	5.7 in	145 mm
OVERALL HEIGHT	2.5 in	64 mm
OVERALL WIDTH	5 in	127 mm
OVERALL LENGTH	32 oz	900 g

KILO8K

KILO8K-ABS 7 x 25 mm Monocular

AB ELITE BALLISTIC RANGEFINDER

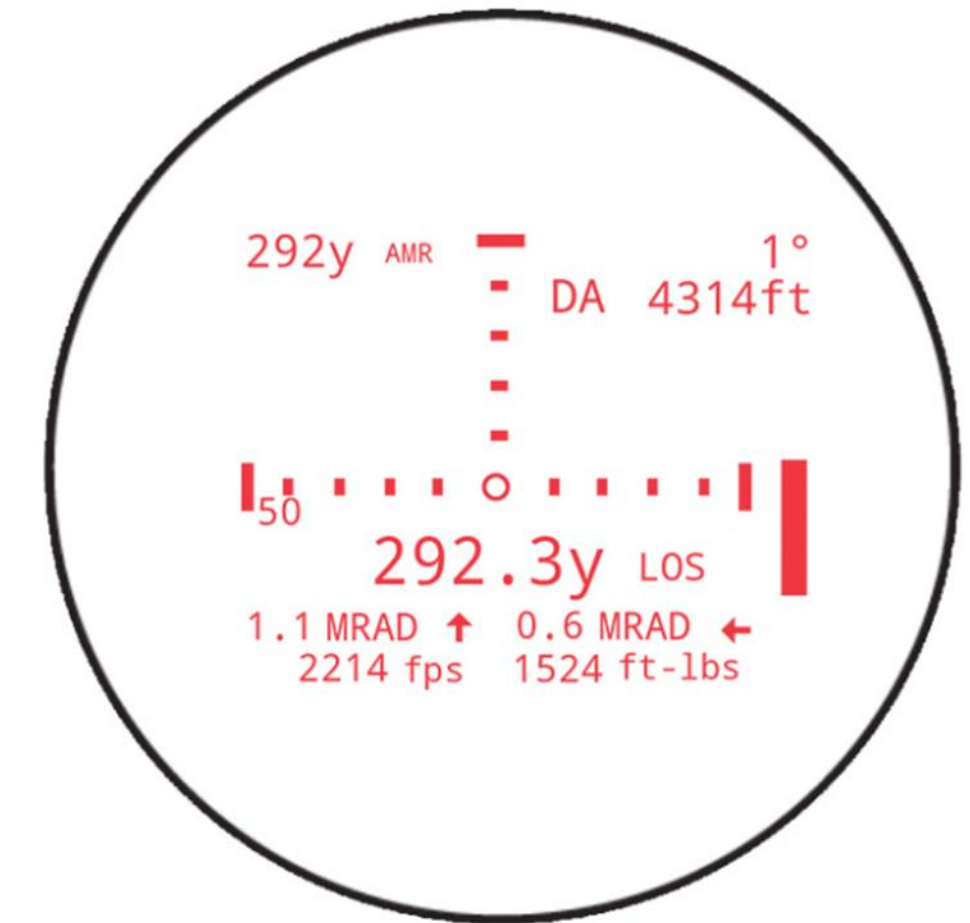

KILO8K-ABS

7 x 25 mm MONOCULAR

SOK8K701

- ▶ GEN II LIGHTWAVE DSP RANGING ENGINE WITH EXTENDED RANGE (XR) MODE
- ▶ ONBOARD ENVIRONMENTAL SENSORS AND DIGITAL COMPASS FOR REAL-TIME BALLISTIC CALCULATIONS
- ▶ DROP REMOTE WAYPOINTS WITH BASEMAP APP
- ▶ APPLIED BALLISTICS ELITE WITH COMPLETE AB BULLET DATABASE AND CUSTOM DRAG CURVES
- ▶ ACTIVE-MATRIX OLED DISPLAY PROVIDES GRAPHICAL REAL-TIME BALLISTICS INFORMATION

SIG SAUER

KILO8K



KILO8K-ABS 7 x 25 mm Monocular


AB ELITE BALLISTIC RANGEFINDER

PRODUCT DETAILS		
SKU#	SOK8K701	
MAGNIFICATION	7x	
RETICLE	CIRCLE, DUPLEX, BOX + MILLING GRID	
DISPLAY	304 x 256 ACTIVE MATRIX OLED	
OBJECTIVE LENS DIAMETER	25 mm	
FIELD OF VIEW	6.78°	
EYE RELIEF	16 mm MINIMUM	
LASER DIVERGENCE	1.25 x 0.25 MRAD	
RUN TIME	4000 RANGES MINIMUM	
BATTERY TYPE	CR2	
WATER PROOF RATING	IPX-4	
MAX RANGE	REFLECTIVE= up to 8,000 yrds TREE = up to 2,500 yrds DEER = up to 2,000 yrds	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	4.4 in	112mm
OVERALL HEIGHT	3 in	76mm
OVERALL WIDTH	1.3 in	33mm
WEIGHT	7.5 oz	215g

KILO10K

KILO10K-ABS HD 10x42mm BINOCULAR

AB ELITE BALLISTIC RANGEFINDER

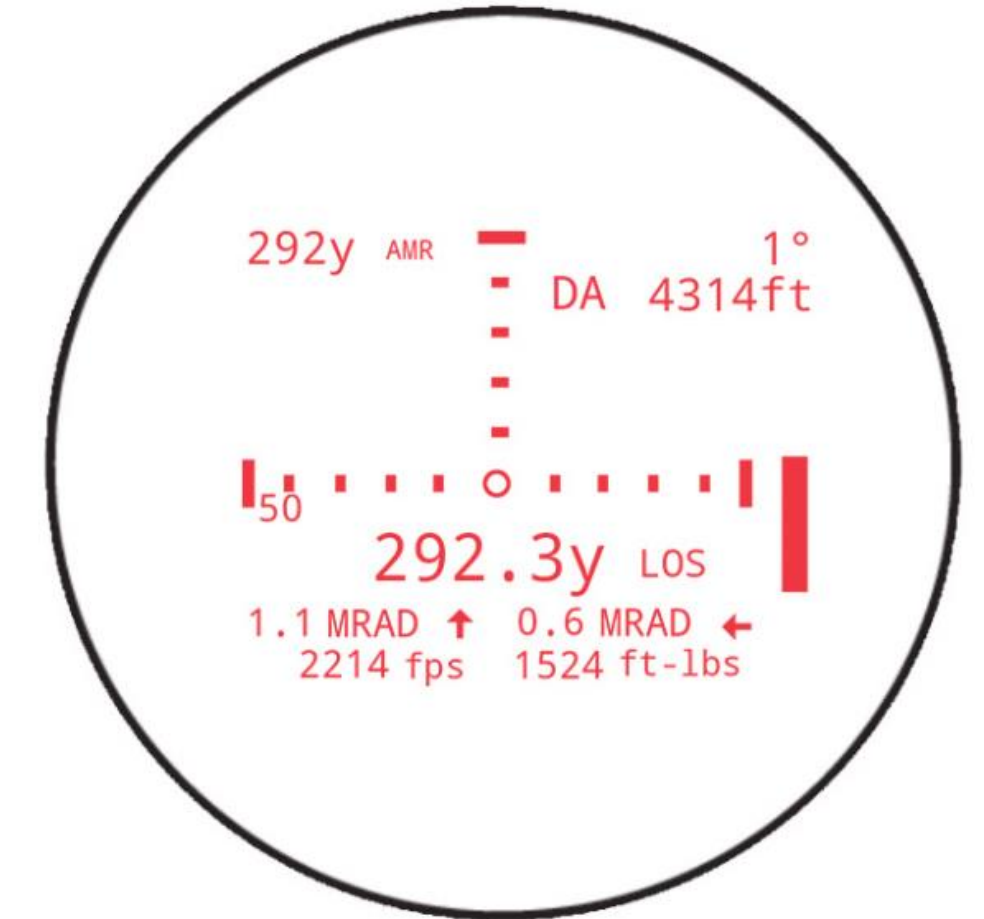

KILO10K-ABS HD

10 X 42 MM BINOCULAR

SOK10K11

- ▶ GEN II LIGHTWAVE DSP RANGING ENGINE WITH EXTENDED RANGE (XR) MODE
- ▶ ONBOARD ENVIRONMENTAL SENSORS AND DIGITAL COMPASS FOR REAL-TIME BALLISTIC CALCULATIONS
- ▶ DROP REMOTE WAYPOINTS WITH BASEMAP APP
- ▶ APPLIED BALLISTICS ELITE WITH COMPLETE AB BULLET DATABASE AND CUSTOM DRAG CURVES
- ▶ ACTIVE-MATRIX OLED DISPLAY PROVIDES GRAPHICAL REAL-TIME BALLISTICS INFORMATION



KILO10K




KILO10K-ABS HD 10x42mm BINOCULAR

AB ELITE BALLISTIC RANGEFINDER

PRODUCT DETAILS		
SKU#	SOK10K11	
MAGNIFICATION	10x	
RETICLE	CIRCLE, DUPLEX, BOX + MILLING GRID	
DISPLAY	304 X 256 ACTIVE-MATRIX OLED	
OBJECTIVE LENS DIAMETER	42 mm	
FIELD OF VIEW	6.1°	
EYE RELIEF	18 mm MINIMUM	
LASER DIVERGENCE	1.5 x 0.06 MRAD	
RUN TIME	4000 RANGES MINIMUM	
BATTERY TYPE	CR2	
WATER PROOF RATING	IPX-4	
MAX RANGE	REFLECTIVE= up to 10,000 yrds TREE = up to 4,000 yrds DEER = up to 3,000 yrds	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	5.7 in	145mm
OVERALL HEIGHT	2.5 in	64mm
OVERALL WIDTH	5 in	127mm
WEIGHT	32 oz	900g

WHISKEY 6 Locking

- 3-18x44mm second focal plane Riflescope
- 30mm Maintube
- Adjustable side focus
- Available with Quadplex or MOA Milling Hunter 2.0
- Includes removable throw lever and sunshade
- Low-profile locking elevation turret
- IPX-7 Waterproofing
- Shipping Q3 2023


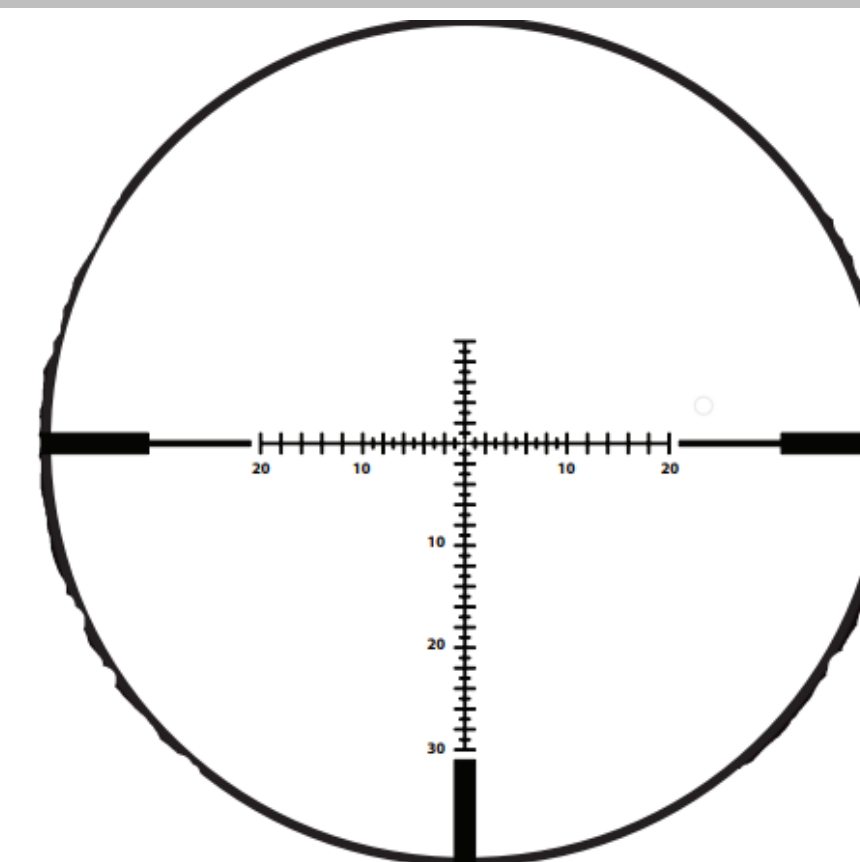


SKU	UPC	MTP	BASE	MAP	MSRP
SOW63112	798681665198	\$679.99	\$679.99	\$899.99	\$1,169.99
SOW63114	798681666980	\$679.99	\$679.99	\$899.99	\$1,169.99

WHISKEY6

WHISKEY6 3-18x44MM

30MM MAINTUBE WITH EXPOSED, LOCKING, ZERO STOP ELEVATION

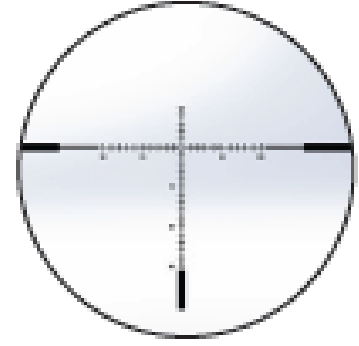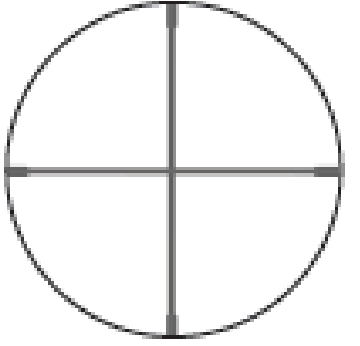PRODUCT DETAILS		
SKU#	SOW63112 / SOW63114	
MAGNIFICATION	3-18x	
OBJECTIVE LENSE DIAMETER	44mm	
MAIN TUBE DIAMTER	30mm	
FOCUL PLANE	SECOND	
FIELD OF VIEW (HIGH/LOW)	5.8' / 34.9' at 100 yards	
EYE RELIEF (HIGH/LOW)	3.9 in / 3.7 in	
EXIT PUPIL (HIGH/LOW)	2.4 mm / 8.2 mm	
ILLUMINATION	N/A	
BATTERY TYPE	N/A	
WATER PROOF RATING	IPX7	
TOTAL TRAVEL	78 MOA	
TRAVEL PER ROTATION	25 MOA	
ADJUSTMENT INCREMENTS	1/4 MOA	
RETICLE BY SKU / UPC	SKU: SOW63112 / UPC: 798681665198  MOA MILLING HUNTER 2.0	SKU: SOW63114 / UPC: 798681666980  QUADPLEX
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	11.9 in	302 mm
OVERALL WEIGHT	23.8 oz	675 g

TANGO-DMR

- 3-18x44mm and 5-30x56mm
- 34mm Maintube
- New DEV-L and Milling 2.0 ret
- Adjustable side focus
- Locking illumination control
- Low-profile locking elevation t
- Low profile capped windage
- IPX-7 Waterproofing
- Shipping Q1 2023



SKU	UPC	MTP	BASE	MAP	MSRP
SOTD63111	798681665556	\$839.99	\$839.99	\$1299.99	\$1689.99
SOTD63112	798681665563	\$839.99	\$839.99	\$1299.99	\$1689.99
SOTD65111	798681665570	\$979.99	\$979.99	\$1499.99	\$1949.99
SOTD65112	798681665587	\$979.99	\$979.99	\$1499.99	\$1949.99


SIERRA6



Integrated BDX™ Ballistic Data Xchange



BDX 2.0 and Onboard, User Configurable, SmartBDC™ with 9 Ballistic Groups

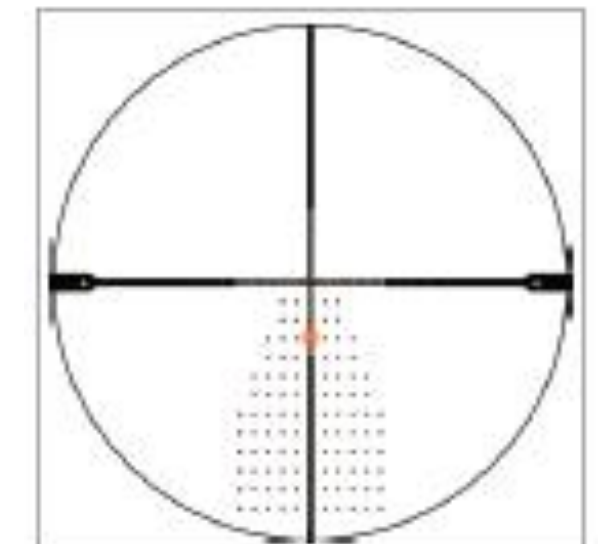

Automatic Holdover Dot displayed on a Digital Focal Plane

SIERRA6BDX


- ▶ Integrated BDX™ Ballistic Data Xchange. A Rangefinder and Riflescope System That Uses Ballistics, Environmental Conditions and Bluetooth® to Illuminate the Exact Holdover Dot Based on Target Distance
- ▶ BDX 2.0 and Onboard, User Configurable, SmartBDC™ with 9 Ballistic Groups
- ▶ Automatic Holdover Dot displayed on a Digital Focal Plane
- ▶ BDX-R2 reticle with 194 individually addressable, LED, hold points
- ▶ Advanced Bluetooth™ with up to 30 yards of connectivity to KILOBDX Laser Rangefinders and other devices
- ▶ Up to 95% light transmission

TANGO MSR



TANGO-MSR LPVO 1-6x24mm

WITH CANTILEVER 30MM ALPHA-MSR MOUNT

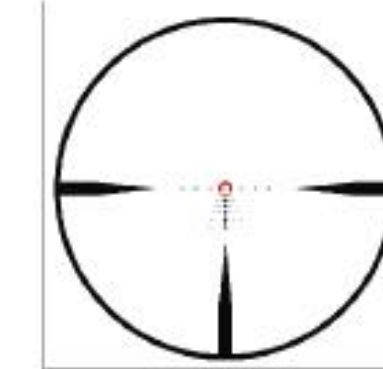

Illuminated BDC6 reticle



Includes removable thread in throw lever



Includes lay flat flip backs

TANGO-MSR LPVO 1-6x24mm	
WITH CANTILEVER 30MM ALPHA-MSR MOUNT	SOT61000
<ul style="list-style-type: none"> ▶ High Performance 6x optical system with low dispersion glass ▶ Integrated thread in throw lever for quick magnification changes ▶ Illuminated MSR BDC-6 reticle with 11x brightness levels ▶ Lay flat flip back lens covers included ▶ Dependable waterproof, shockproof and fog proof performance ▶ Includes ALPHA-MSR 1 piece aluminum cantilever mount 	

SKU#:	SOT61000
UPC:	798681642502
BASE:	\$288.99
MTP/MAP	N/A
MSRP:	\$499.99


TANGO MSR



TANGO MSR

RIFLESCOPE

PRODUCT DETAILS		
SKU#	SOT61000	
MAGNIFICATION	1-6	
OBJECTIVE LENSE DIAMETER	24mm	
RETICLE	MSR-BDC6	
FOCAL PLANE	2ND	
FIELD OF VIEW (LOW/HIGH)	19.6-124.8 ft @ 100 yards	
EYE RELIEF(LOW/HIGH)	95-100mm	
EXIT PUPIL (LOW/HIGH)	4.5-10.5-4mm	
OPTIC COATING	SPECTRACOAT, LENSARMOR	
ILLUMINATION	11 SETTINGS	
BATTERY TYPE	CR2032	
WATER PROOF RATING	IPX7	
TOTAL TRAVEL	150 MOA	
TRAVEL PER ROTATION	44 MOA	
ADJUSTMENT INCREMENTS	0.5 MOA	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	10.4 in	265mm
WEIGHT (OZ)	18.5 oz	525 g

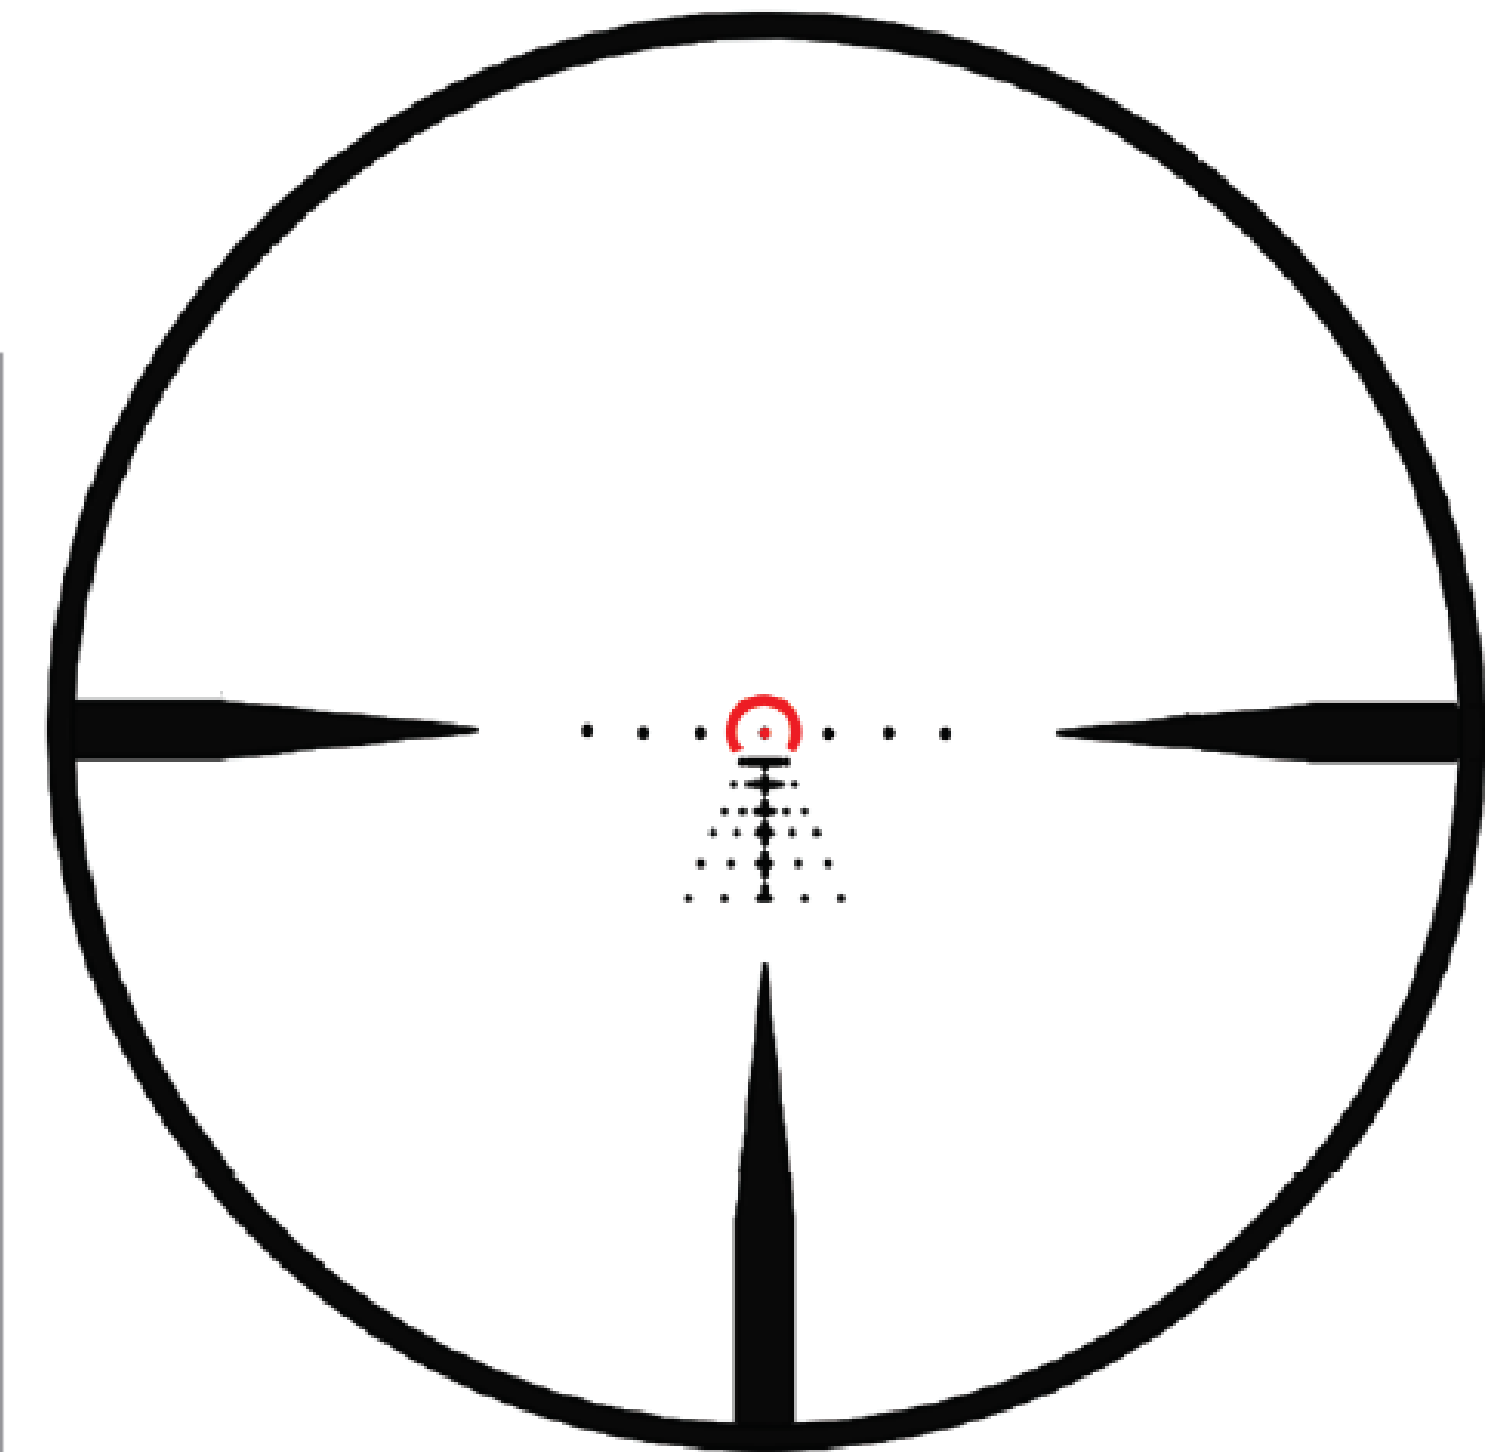


Illuminated MSR BDC6 reticle

TANGO MSR

TANGO-MSR LPVO 1-8x24mm

WITH CANTILEVER 30MM ALPHA-MSR MOUNT

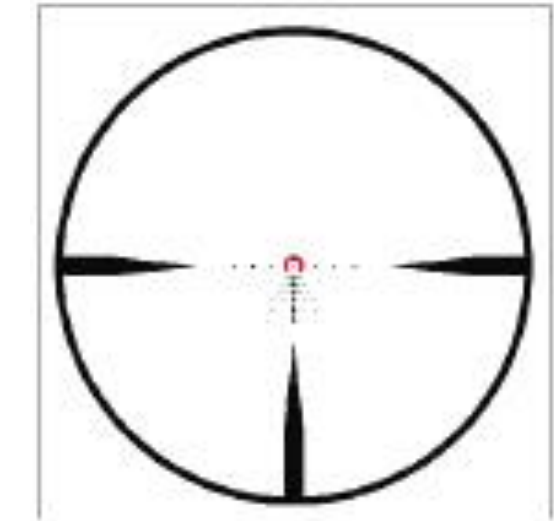

Illuminated BDC-8 reticle



Includes removable thread in throw lever



Includes lay flat flip backs

TANGO-MSR LPVO 1-8x24mm

WITH CANTILEVER 30MM ALPHA-MSR MOUNT

SOTM81000

- ▶ High Performance 8x optical system with low dispersion glass
- ▶ Integrated thread in throw lever for quick magnification changes
- ▶ Illuminated MSR BDC-8 reticle with 11x brightness levels
- ▶ Lay flat flip back lens covers included
- ▶ Dependable waterproof, shockproof and fog proof performance
- ▶ Includes ALPHA-MSR 1 piece aluminum cantilever mount

SKU#: SOTM81000

UPC: 798681656127

MTP/BASE: \$364.99

MAP: \$479.99

MSRP: \$629.99

SIG SAUER

TANGO MSR

TANGO-MSR LPVO 1-10x28mm

WITH CANTILEVER 34MM ALPHA-MSR MOUNT



Illuminated BDC-10 reticle



Includes removable thread in throw lever



Includes lay flat flip backs

TANGO-MSR LPVO 1-10x28mm	
WITH CANTILEVER 34mm ALPHA-MSR MOUNT	SOTM11000
<ul style="list-style-type: none"> ▶ High Performance 10x optical system with low dispersion glass ▶ Integrated thread in throw lever for quick magnification changes ▶ Illuminated MSR BDC-10 reticle with 11x brightness levels ▶ Lay flat flip back lens covers included ▶ Dependable waterproof, shockproof and fog proof performance ▶ Includes aluminum 34mm ALPHA-MSR cantilever mount 	

SKU#:	SOTM11000
UPC:	798681656097
MTP/BASE:	\$449.99
MAP:	\$579.99
MSRP:	\$759.99



TANGO MSR 1-10 FFP

TANGO-MSR FFP 1-10x26mm

WITH CANTILEVER 34MM ALPHA-MSR MOUNT



Illuminated BDC-10 FFP retic



Includes removable thread in throw lever



Includes lay flat flip backs

TANGO-MSR FFP 1-10x26mm

WITH CANTILEVER 34mm ALPHA-MSR MOUNT

SOTM11002

- ▶ High Performance 10x optical system with low dispersion glass
- ▶ Integrated thread in throw lever for quick magnification changes
- ▶ Illuminated MSR BDC-10 reticle with 11x brightness levels
- ▶ Lay flat flip back lens covers included
- ▶ Dependable waterproof, shockproof and fog proof performance
- ▶ Includes aluminum 34mm ALPHA-MSR cantilever mount
- ▶ Front Focal Plane (FFP) BDC-10 provides accurate ranging and hold overs at all magnification ranges

TANGO MSR 1-10 FFP

PRODUCT DETAILS		
SKU#	SOTM11002	
MAGNIFICATION	1-10x	
OBJECTIVE LENSE DIAMETER	26mm	
MAIN TUBE DIAMTER	34mm	
RETICLE	FFP MSR BDC10	
FOCAL PLANE	First	
FIELD OF VIEW (HIGH/LOW)	12 to 120 Feet at 100 Yards	
EYE RELIEF (HIGH/LOW)	82.5 to 87.5 mm	
EXIT PUPIL (HIGH/LOW)	2.6 to 7.6mm	
ILLUMINATION	Yes	
BATTERY TYPE	CR2032 (included)	
WATER PROOF RATING	IPX7	
TOTAL TRAVEL	>100MOA in both Windage and	
TRAVEL PER ROTATION	Elevation 50 MOA	
ADJUSTMENT INCREMENTS	1/2 MOA per CLICK	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	11 in	280mm
WEIGHT	21.9oz	620g

OSCAR 8 SPOTTING SCOPE

OSCAR8

Features

- ▶ HDX Advanced optical system comprising both High Definition (ED) and High Transmittance (HT) glass for ultra-high resolution, optical performance and light transmission
- ▶ SCHMIDT-PECHAN prism, combined with HD glass, provide unmatched chromatic and spherical aberration correction for clear, vibrant images
- ▶ Spectracote™ highly efficient, ultra-wide broadband, anti-reflection lens coatings reduce surface reflections to extremely low levels across the entire visible spectrum providing superior light transmission
- ▶ Angled eyepiece, combined with rotating tripod collar, provides the user with multiple viewing angles, to accommodate setup and usage in any terrain
- ▶ Comes equipped with a variable power eyepiece. This eyepiece can be locked into place or removed so that the OSCAR8 can accept other variable or fixed power eye-pieces.
- ▶ Waterproof and fog proof, the OSCAR8 will provide unmatched performance in all environmental conditions
- ▶ Adjustable eyecups allow the user to optimize eye relief for use with or without glasses
- ▶ Lightweight and robust aircraft grade aluminum housing, combined with rubberized non-slip grip armor, ensures a lifetime of use in the worst conditions
- ▶ Custom SIG SAUER fitted neoprene cover included
- ▶ Covered by SIG SAUER's INFINITE Guarantee™ and Electronics Limited Warranty, see website for full details.
- ▶ Assembled in USA



ROME04XT PRO

ROME04XT-PRO 1x20 mm


MIL-SPEC RED DOT SIGHT

ROME04XT-PRO

MIL-SPEC RED DOT SIGHT

SOR44001 (BLACK), SOR44002 (FDE)

- ▶ Designed, built and tested for hard, professional use
- ▶ High performance lens coatings for elite performance in bright light or passive NV conditions
- ▶ Top mounted activation with NV Override control
- ▶ 4 onboard, user selectable reticle options
- ▶ Durable half-inch hex mount
- ▶ 9 Daytime settings, 3 NV settings
- ▶ 3 mounting heights come standard in the box
- ▶ Includes clear flip-backs, opaque front flip back, and ARD Kill-Flash
- ▶ 50,000 hr runtime with common AAA Battery
- ▶ Assembled in USA

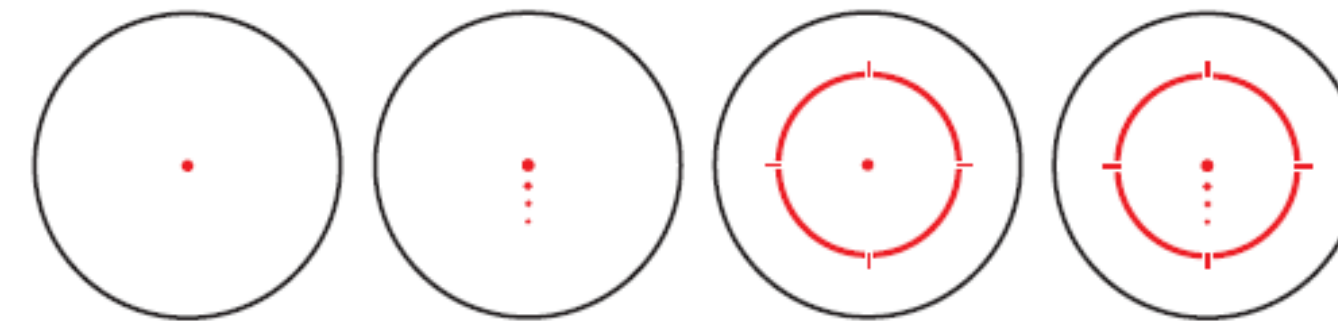

2 MOA RED DOT BALLISTIC CIRCLE DOT



Top mounted activation with NV Override



Protected Adjustments



Common AAA Battery

ROME04XT PRO

PRODUCT DETAILS		
SKU#	SOR44001 (Black) and SOR44002 (FDE)	
MAGNIFICATION	1x	
SIGHT HEIGHT	1.41 in / 1.63 in	
RETICLE	QUAD BALLISTIC CIRCLE DOT	
CLEAR APERTURE	20mm	
OPTIC COATING	NOTCH, ANTI-REFLECTIVE, SCRATCH RESISTANT, HYDROPHOBIC	
ILLUMINATION SETTINGS	9 Day Time and 3 NV	
BATTERY TYPE	AAA	
WATER PROOF RATING	IPX-8	
TOTAL TRAVEL	100 MOA	
RUN TIME IN HOURS	50,000	
ADJUSTMENT	0.5 MOA PER CLICK	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	3.4 in	86 mm
OVERALL HEIGHT	2.5 in	64 mm
OVERALL WIDTH	2.3 in	58 mm
WEIGHT W/O BATTERY	7.0 oz	198 g

ACCESSORIES:



COMPLETE ASSORTMENT OF LENS COVERS



SPACER KIT AND MULTI-TOOL

ROME01PRO



ROME01PRO™

MINIATURE OPEN REFLEX SIGHT


ROME01PRO

Features

- ▶ Molded glass aspheric lens with high performance coatings for superior light transmittance and zero distortion
- ▶ 3 or 6 MOA red dot with multiple brightness settings for rapid target engagement under a full range of lighting conditions
- ▶ TruHold™ Lockless Zeroing System that utilizes twin adjustment springs designed to endure handgun recoil and return to zero shot after shot
- ▶ New point-source emitter provides exceptional brightness with 12 settings (10 Daytime/2 NV), and 20,000+ hours of runtime
- ▶ MOTAC™ (Motion Activated Illumination System) that powers up when it senses motion and powers down when it does not
- ▶ Aircraft grade CNC Aluminum housing ensures a lifetime of reliable service
- ▶ Dependable waterproof (IPX-7 rated for complete water immersion up to 1 meter) and fogproof performance
- ▶ Ruggedized protective steel shroud included for extreme durability
- ▶ SIG SAUER® Electro-Optics Infinite Guarantee™ and SIG SAUER Electronic Component Limited 5-Year Warranty

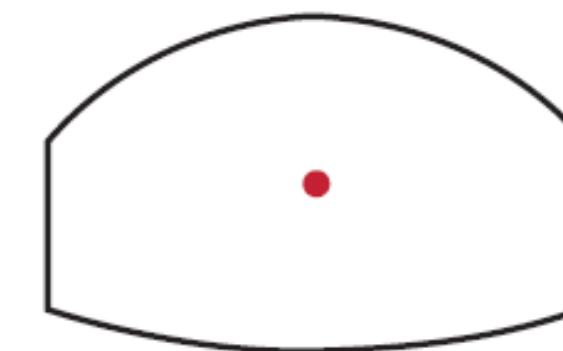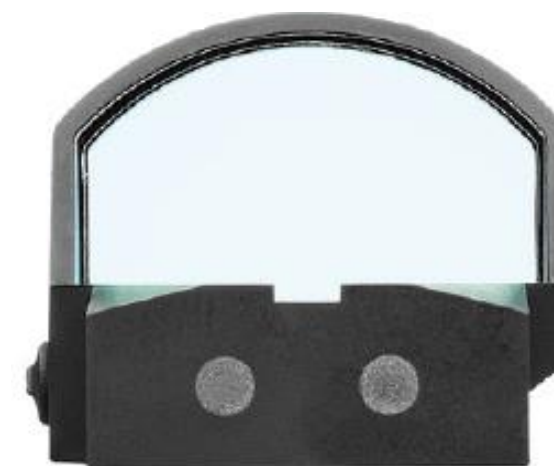

3 MOA Red Dot

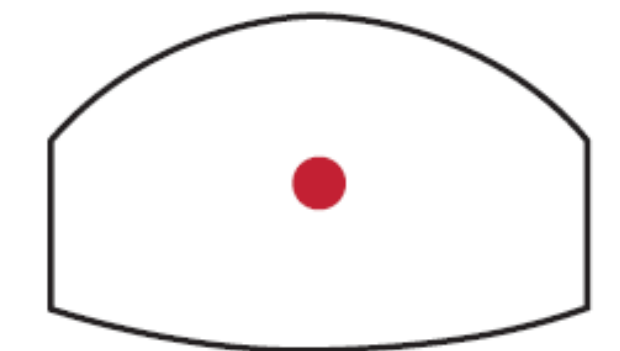

6 MOA Red Dot

ROME01PRO

PRODUCT IDENTIFICATION

A – 1.8 in / 46.5mm

B – 1.2 in / 31.7mm


C – 1.0 in / 25.4mm

D – 1.1 in / 27.4mm

E – 0.4 in / 10.8mm

ROME01PRO SPECIFICATIONS

Magnification	1x30mm
Illumination Settings	10 Daytime / 2 NV
Window Height	.71 in / 18mm
Window Width	1.1 in / 28mm
Overall Elevation Adjustment Range	100 MOA
Overall Windage Adjustment Range	100 MOA
Weight	1.0 oz / 28 g
Battery	CR1632
Waterproofing	IPX7

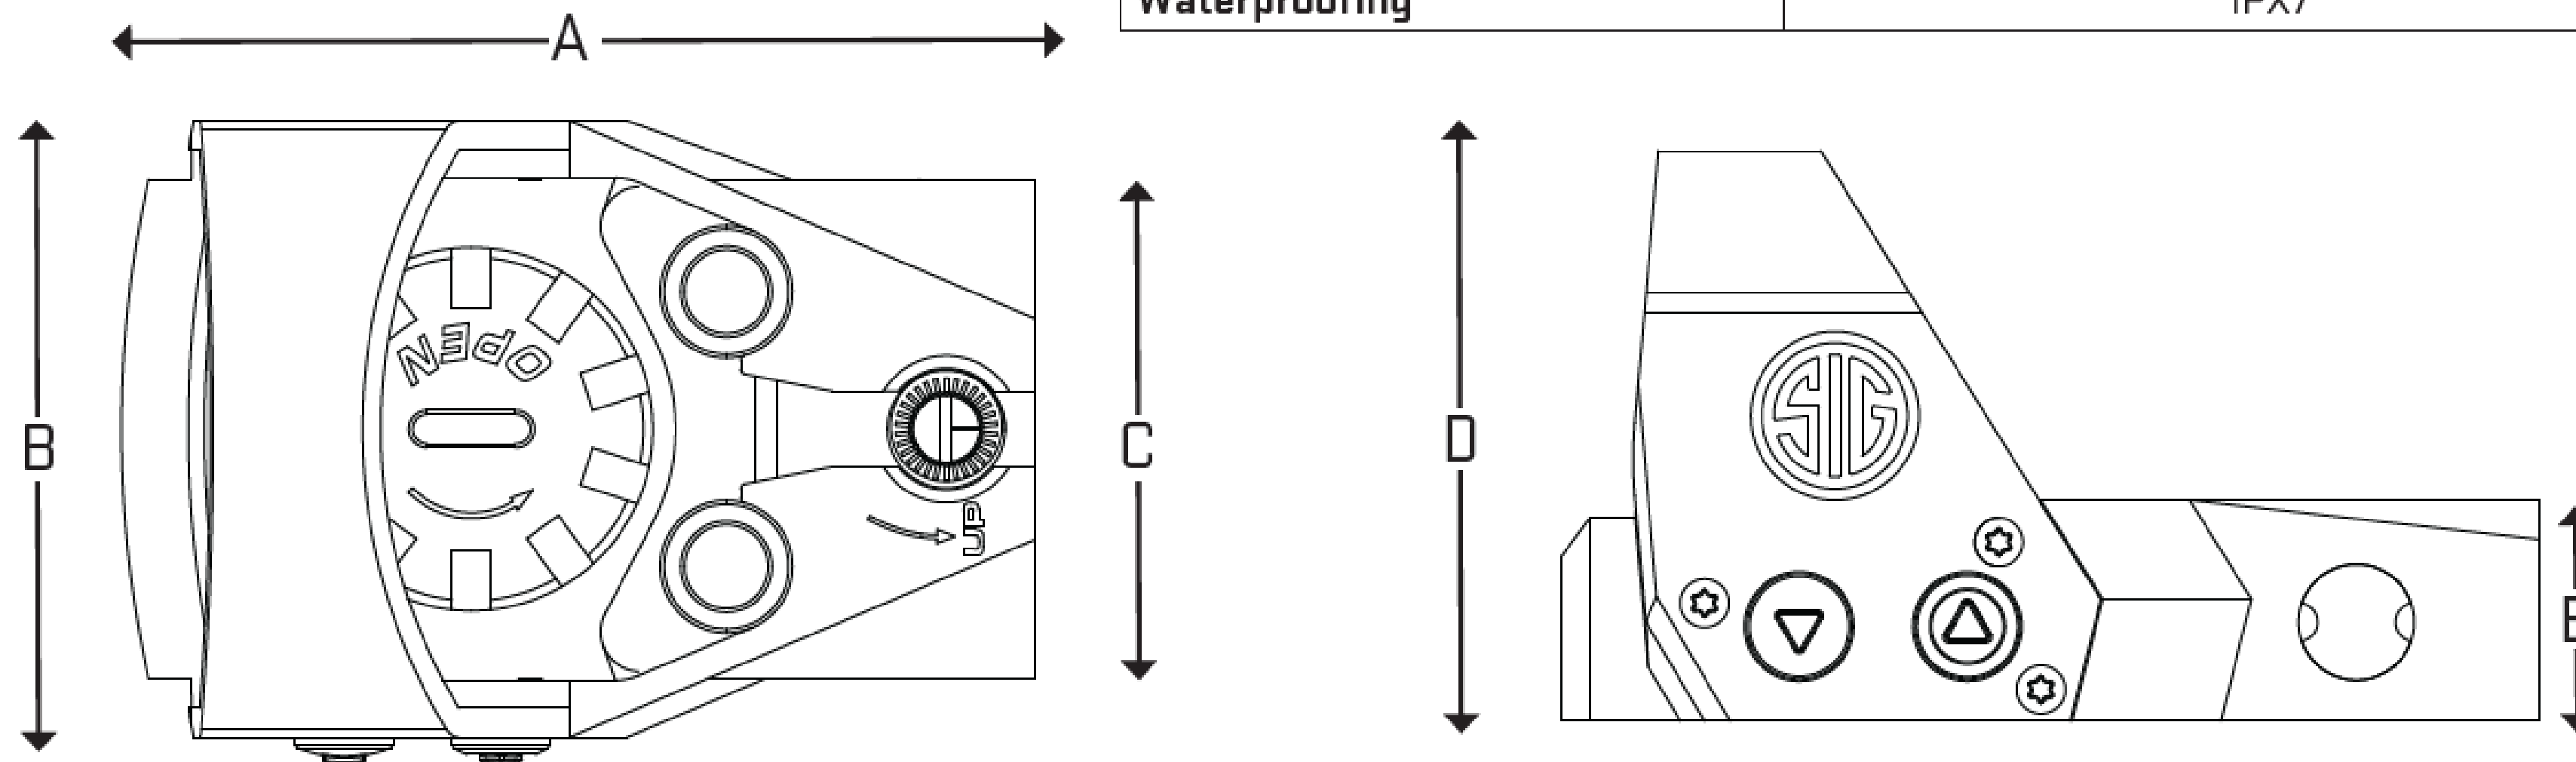


ECHO 3



- 1-6X23MM
- 2-12X40MM

- - Compact Thermal Reflex Style Sight (Don't get Stuck "Behind" a Scope)
- BDX Enabled WiFi/Bluetooth®, Allowing Active Reticles that Change with KILO® Rangefinder Input.
- - Customizable Fixed Reticles that are Configured from the BDX Mobile Application
- Uncooled 320x240 12μ VOx LWIR Core Operating at 30Hz (ITAR Controlled)
- LevelPlex™ Anti-Cant System with Scope Cant Sensitivity down to 0.5°
- MOTAC™ (Motion Activated Display) Powers up when it Senses Motion
- Video and Image Recording (including recoil activation) with 8 Color Palettes
- Greater than 6 Hours of Run Time with Heavy Use
- Easy to Adjust Lens with Optional Throw Lever Attachment
- Optional Quick Disconnect Mount
- Designed and Assembled in the U.S.A. to Withstand IPX-6 Conditions

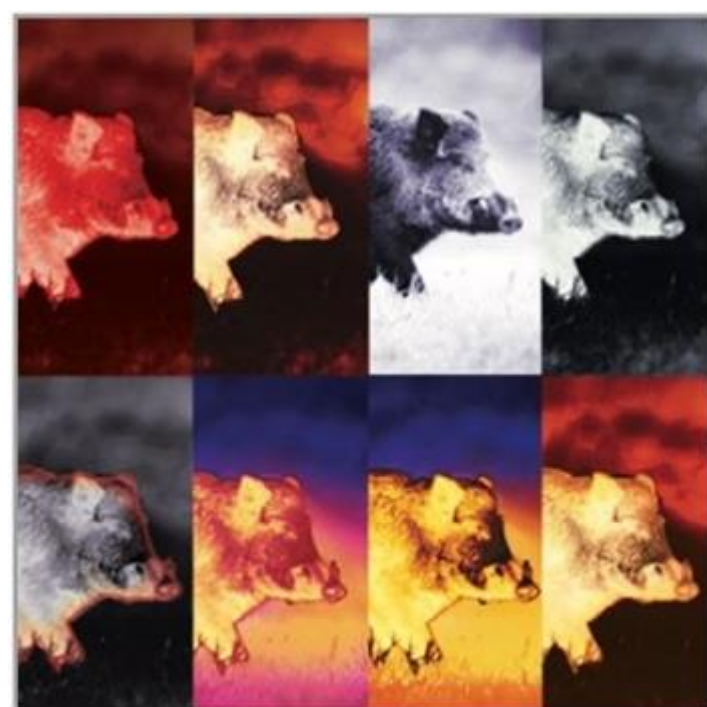

Video and Image Recording
(Including Recoil Activation)
with 8 Color Palettes



Customizable Fixed Reticles
that are Configured from the
BDX Mobile App

ECHO3™ 1-6x23mm

THERMAL REFLEX SIGHT

PRODUCT DETAILS		
SKU#	SOEC31001	
MAGNIFICATION	1-6x23mm	
FIELD OF VIEW	10°	
FRAME RATE	30 Hz	
RESOLUTION	320X240	
COLOR/CONTRAST SETTINGS	8	
VIDEO RECORDING	YES	
BDX ENABLED	YES	
RUNTIME	6+ HOURS	
BATTERY	(2) CR123	
WATERPROOF	IPX-4	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	4.1 in	104mm
OVERALL HEIGHT	3.1 in	79mm
OVERALL WIDTH	2.6 in	66mm
WEIGHT	14.5 oz	411g

ECHO3™ 2-12x40mm

THERMAL REFLEX SIGHT

PRODUCT DETAILS		
SKU#	SOEC32001	
MAGNIFICATION	2-12x40mm	
FIELD OF VIEW	5.8°	
FRAME RATE	30 Hz	
RESOLUTION	320X240	
COLOR/CONTRAST SETTINGS	8	
VIDEO RECORDING	YES	
BDX ENABLED	YES	
RUNTIME	6+ HOURS	
BATTERY	(2) CR123	
WATERPROOF	IPX-4	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	4.7 in	120mm
OVERALL HEIGHT	3.6 in	92mm
OVERALL WIDTH	2.6 in	66mm
WEIGHT	16.6 oz	471g

