




R5 RIFLESCOPE

- HD Optical System for maximum light transmission, contrast, and resolution.
- Fully-Multi Coated lenses for maximum light transmission.
- The reticle is etched directly into the glass for a more precise and feature packed design.
- Keep your glass clear with Bushnell's exclusive EXO Barrier™ lens coating that repels water, oil, dust, and debris.
- IPX7 Waterproof, and Fog-Proof construction.
- Nitrogen purged to prevent fogging from the inside even with extreme temperature shifts.
- 1 inch single-piece shockproof tube, constructed of aircraft grade aluminum.
- Side focus provides easy focusing at any range, without adding length to the scope.*

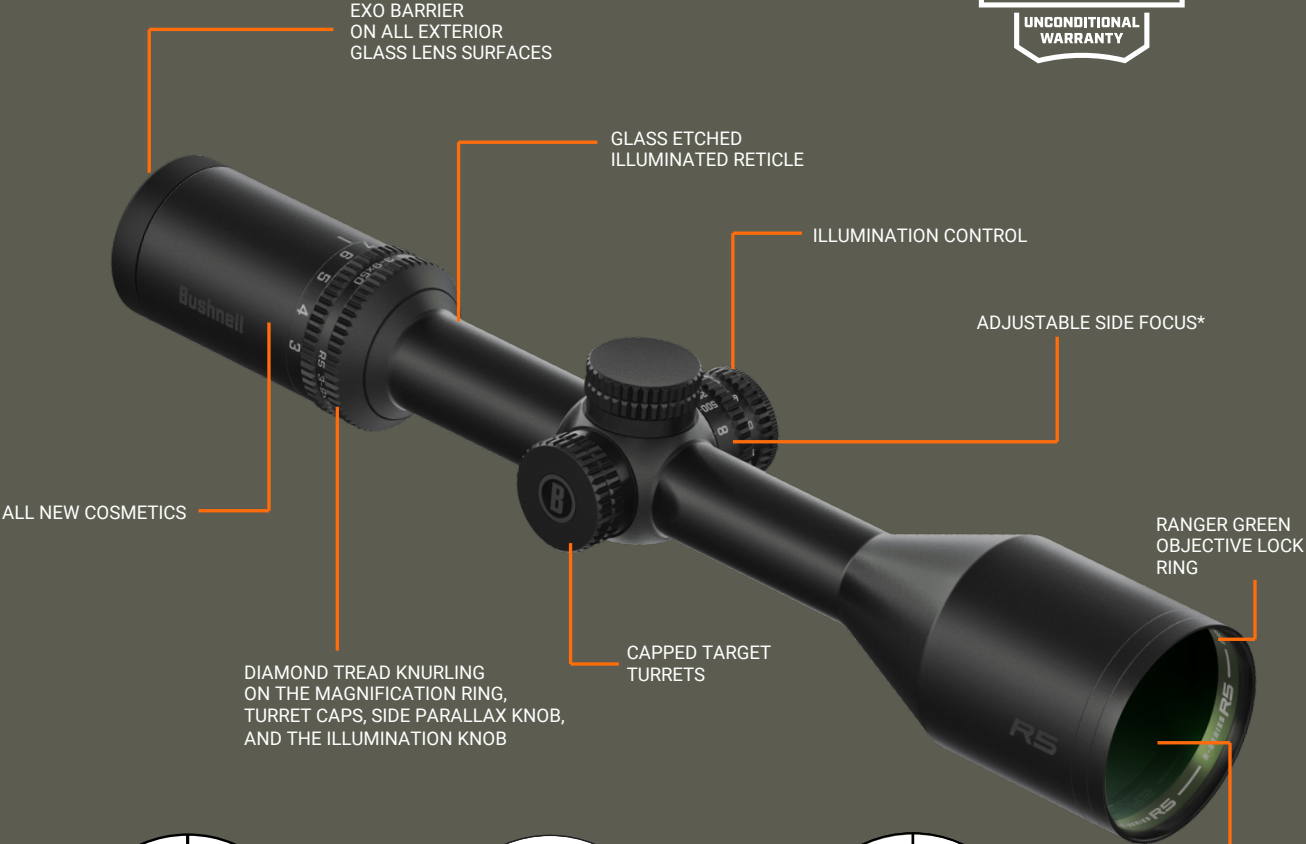

ALL NEW COSMETICS

EXO BARRIER
ON ALL EXTERIOR
GLASS LENS SURFACES

GLASS ETCHED
ILLUMINATED RETICLE

ILLUMINATION CONTROL




ADJUSTABLE SIDE FOCUS*

RANGER GREEN
OBJECTIVE LOCK
RING

FULLY MULTI-
COATED OPTICS

DIAMOND TREAD KNURLING
ON THE MAGNIFICATION RING,
TURRET CAPS, SIDE PARALLAX KNOB,
AND THE ILLUMINATION KNOB

CAPPED TARGET
TURRETS



Illuminated
DOA-LRH800 Reticle

Illuminated DD2-QA
Reticle (1-6x24)

Illuminated
Multi-X

SKU	MAG x OBJ	RETICLE	FIELD OF VIEW Low-High Mag. ft@100yds / m@100m	TUBE SIZE	WEIGHT	LENGTH
R5-1624S26	1-6X24*	Illum. DD2-QA	110'-17'/ 36.7m-5.7m	30mm	17.3oz/ 491g	9.7"/245mm
R5-3940S9	3-9x40	Illum. Multi-X	35'-12'/ 11.7m-4m	1in	19.5oz/ 553g	11.5"/292mm
R5-3940S25	3-9x40	Illum. DOA-LRH800	35'-12'/ 11.7m-4m	1in	19.5oz/ 553g	11.5"/292mm
R5-3950S9	3-9x50	Illum. Multi-X	35'-12'/ 11.7m-4m	1in	21.7oz/ 614g	12.3"/313mm
R5-3950S25	3-9x50	Illum. DOA-LRH800	35'-12'/ 11.7m-4m	1in	21.7oz/ 614g	12.3"/313mm
R5-41240S25	4-12x40	Illum. DOA-LRH800	27ft - 9ft/ 9m-3m	1in	19.6oz/ 556g	11.4"/290mm
R5-61850S25	6-18x50	Illum. DOA-LRH800	18'-6' / 6m-2m	1in	22.1oz/ 627g	12.6"/320mm

*1-6x24 does not have side focus. 30mm tube.

