

Energizer®

Gas Powered Inverter Generator

eZV2200i 2,200 Peak Watts
1,800 Running Watts



Parallel Ready

Parallel with any i-Series *Energizer* inverter generator to combine power outputs, using the i-Series parallel kit (not included).



Lightweight

Compact enough to lift and travel with one-handed and fits in even the smallest of car trunks, with loads of room left for your gears.



Quiet Running Volume

Running as quietly as a friendly conversation, your neighbors won't even notice you power up.



Fuel Efficient

Digitally controlled to lower your fuel costs, keep EcoMode on to produce the right amount of power for your devices.



Call us and you'll speak to a Canadian. We have high standards for our products, and if they're not met, our in-house support team will help you get back up and running right away or booked into a local service center for hands-on support from an expert. Tech support, express parts, and skilled labour are all included in your warranty.















The quiet workhorse you can travel with.


The eZV2200i is a compact source of safe power for your next event, jobsite, or when the power goes out and you need it most. Extra convenience using the DC ports, including USB for your smart devices.

Pairs with any other *Energizer i-Series* generator (inverter generators and Parallel Kit sold separately).

Features

-  Parallel Power
-  Quiet Running
-  Light Weight
-  Auto Voltage Regulation
-  Fuel Saving Mode
-  Low Oil Shutoff
-  Long Runtime
-  Compact Design
-  Protected Outlets
-  Easy Maintenance
-  Battery Charging
-  Electronics Friendly

Certifications

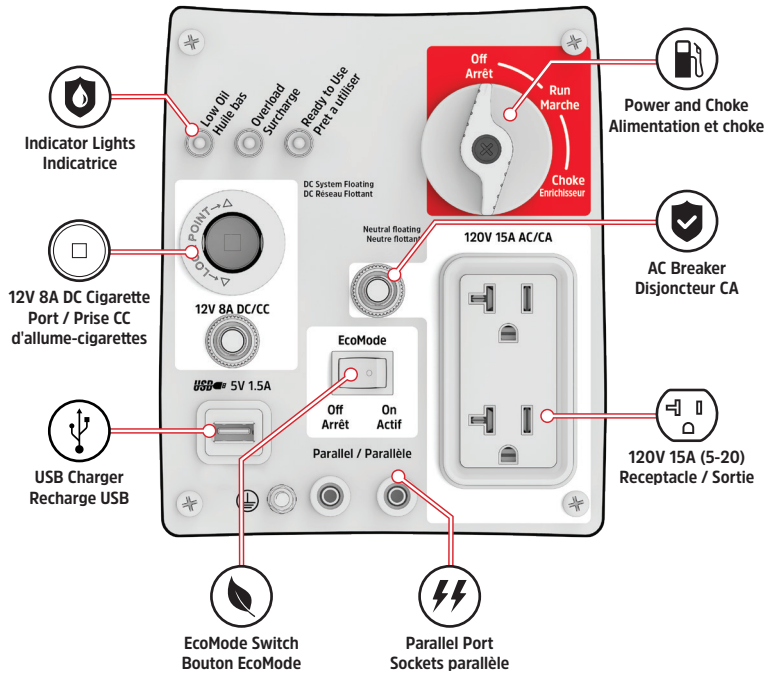

Peak Watts	2,200W
Running Watts	1,800W
Voltage	120V
Amperage	15A
Starting	Recoil
Sound Level	61-70 dB(A)
Engine Type	Single Cylinder 4 Stroke OHV
Engine Brand	Energizer OEM
Displacement	80 cc
Engine Horse Power (HP)	2.9 HP
Alternator Frequency (Hz)	60 Hz
Total Harmonic Distortion	< 3%
Run Time (100/25 Load)	3.2 / 9.0 hrs
Fuel Type	Gasoline
Fuel Tank	4 L
Recommended Oil	SAE 10W-30

Oil Capacity	350 mL
Smart Device Protection	No
Electric Start Battery	No
EcoMode Switch	Yes
Fuel Gauge	No
Voltage Switch	No
Covered Outlets	Yes
Hour Meter Display	No
Low Oil Shutdown	Yes
Automatic Voltage Regulator	Yes
Wheel Kit	No
Folding Handle	No
Grounding	Floating
Choke Type	Manual
Dimensions (LxWxH)	20 x 12 x 18 in
Weight	46.6 lb